B BRAUN
SHARING EXPERTISE







AESCULAP® POWER SYSTEMS

CATALOG 2022

ELAN 4 and Acculan 4

CONTENT

ELAN 4

- ELAN 4 electro
- ELAN 4 Accessories

Acculan 4

- Acculan 4 & Acculan 4 Small Drill
- Acculan 4 Electro
- Acculan 4 Accessories

PROCESSING

- Sterilit® Power Systems
- Processing

OTHERS

- Tool Attachments Overview
- Signs & Symbols
- Brochures
- Index

All measurements and technical data listed in this catalogue are approximate as they are subject to normal manufacturing tolerances and to technical modifications.

AESCULAP® ELAN 4

PRECISION. PERFORMANCE. PLEASURE.

With its technical concept ELAN 4 addresses important requirements of the surgeon and all parties involved in handling power systems in the hospital.

- Convenient and reliable grip
- Powerful, precise and reliable work
- Easy to set up and simple to use



AESCULAP® ELAN 4

ELAN 4 electro

ELECTRIC HIGHSPEED SYSTEM



ELAN 4 electro
BASIC COMPONENTS

GA800

ELAN 4 electro CONTROL UNIT

with irrigation pump; touch screen; power cord not included
pump flow 0 - 65 ml / min

100 - 240 V AC; 50 / 60 Hz;
380 x 330 x 200 mm; 9,500 g

consisting parts:
GD412804 bottle holder



GA808

ELAN 4 electro FOOT CONTROL

protection type IPX8; anaesthetic proof class AP

5.0 m;
245 x 144 x 76 mm; 2,240 g



GA810

ELAN 4 electro WIRELESS FOOT CONTROL

protection type IPX8; anaesthetic proof class AP

271 x 266 x 85 mm; 3,800 g

Requires control unit with software version V3.00.



GA806

GB073R

ELAN 4 electro MOTOR CABLE

for use with ELAN 4 electro applied parts

4.0 m; 270 g

consisting parts:
GB600860 Sterilit® spray adapter ELAN 4 electro



AESCULAP® ELAN 4

ELAN 4 electro

BASIC COMPONENTS, PERFORATOR DRIVER & LOWSPEED MOTOR

GA804 GB073R

ELAN 4 electro MOTOR CABLE WITH HAND SWITCH

for use with ELAN 4 electro applied parts

4.0 m; 374 g

consisting parts:
GB600860 Sterilit® spray adapter ELAN 4 electro



GA805 GB073R

ELAN 4 electro MOTOR CABLE WITH HAND CONTROL

for use with ELAN 4 electro applied parts

4.0 m; 369 g

consisting parts:
GB600860 Sterilit® spray adapter ELAN 4 electro



GA822 GB076R

ELAN 4 electro PERFORATOR DRIVER

for use with cranial perforators with Hudson shank

180 W; ↙↘; 0 - 1,200 rpm; 250 Ncm; 166 x 35 mm; 410 g



GA824 GB077R

ELAN 4 electro LOWSPEED MOTOR

with intra coupling

180 W; ↙↘; 0 - 40,000* rpm; 10 Ncm; 123 x 23 mm; 150 g

* Requires control unit with software version V3.00. With lower versions the motor runs max. 20,000 rpm.



ELAN 4 electro
CRANIOTOME & ATTACHMENTS

GA849 GB085R

ELAN 4 electro CRANIOTOME AND MULTIFUNCTION HANDPIECE

2-ring coding; for use with dura guards and holding sleeves GB941R - GB947R; spray nozzle GA259SU (not included)

140 W; ; 0 - 80,000 rpm; 2.2 Ncm; 156 x 17 mm; 121 g



GB941R GB719R

ELAN 4 DURA GUARD PEDIATRIC

fixed; 1 dot coding;
for craniotome and multifunction handpieces GA749, GA849



GB942R GB719R

ELAN 4 DURA GUARD STANDARD


fixed; 2 dot coding;
for craniotome and multifunction handpieces GA749, GA849



GB943R GB719R

ELAN 4 DURA GUARD LONG

fixed; 3 dot coding;
for craniotome and multifunction handpieces GA749, GA849



GB945R GB719R

ELAN 4 HOLDING SLEEVE

for craniotome and multifunction handpieces GA749, GA849



GB947R GB719R

ELAN 4 DURA GUARD STANDARD

turnable; 2 dot coding;
for craniotome and multifunction handpieces GA749, GA849



AESCULAP® ELAN 4

ELAN 4 electro

1-RING HIGHSPEED HANDPIECES

GA861 GB083R

ELAN 4 electro 1-RING HANDPIECE L4

1-ring coding;
spray nozzle GA261SU (not included)

140 W; ; 0 - 80,000 rpm; 2.2 Ncm;
152 x 16 mm; 80 g



GA862 GB083R

ELAN 4 electro 1-RING HANDPIECE L7

1-ring coding;
spray nozzle GA262SU (not included)

140 W; ; 0 - 80,000 rpm; 2.2 Ncm;
177 x 16 mm; 83 g




GA863 GB083R

ELAN 4 electro 1-RING HANDPIECE L10

1-ring coding;
spray nozzle GA263SU (not included)

140 W; ; 0 - 80,000 rpm; 2.2 Ncm;
206 x 16 mm; 87 g



GA864 GB083R

ELAN 4 electro 1-RING HANDPIECE L13

1-ring coding;
spray nozzle GA264SU (not included)

140 W; ; 0 - 80,000 rpm; 2.2 Ncm;
237 x 16 mm; 91 g



ELAN 4 electro
2-RING HIGHSPEED HANDPIECES

GA865 GB083R

ELAN 4 electro 2-RING HANDPIECE L7

2-ring coding;
spray nozzle GA265SU (not included)

140 W; ; 0 - 80,000 rpm; 2.2 Ncm;
176 x 16 mm; 89 g



GA866 GB083R

ELAN 4 electro 2-RING HANDPIECE L10

2-ring coding;
spray nozzle GA266SU (not included)

140 W; ; 0 - 80,000 rpm; 2.2 Ncm;
206 x 16 mm; 95 g



GA867 GB083R

ELAN 4 electro 2-RING HANDPIECE L13

2-ring coding;
spray nozzle GA267SU (not included)

140 W; ; 0 - 80,000 rpm; 2.2 Ncm;
236 x 16 mm; 100 g



GA868 GB083R

ELAN 4 electro 2-RING HANDPIECE L17

2-ring coding;
spray nozzle GA268SU (not included)

140 W; ; 0 - 80,000 rpm; 2.2 Ncm;
276 x 16 mm; 108 g



GA869 GB083R

ELAN 4 electro 2-RING HANDPIECE L22

2-ring coding;
spray nozzle GA269SU (not included)

140 W; ; 0 - 80,000 rpm; 2.2 Ncm;
326 x 16 mm; 118 g



AESCULAP® ELAN 4

ELAN 4 electro

MIS HANDPIECE & HANDPIECE SHAFTS



GA860 GB084R

ELAN 4 electro MIS HANDPIECE

for use with MIS handpiece shafts GB920R - GB927R

140 W; ; 0 - 80,000 rpm; 2.2 Ncm; 118 x 17 mm; 100 g



GB920R GB723R

ELAN 4 MIS HANDPIECE SHAFT L10 STRAIGHT

spray nozzle GB796SU (not included)



GB921R GB723R

ELAN 4 MIS HANDPIECE SHAFT L10 CURVED

spray nozzle GB796SU (not included)



GB922R GB723R

ELAN 4 MIS HANDPIECE SHAFT L10 HEAVY CURVED

spray nozzle GB796SU (not included)



GB925R GB723R

ELAN 4 MIS HANDPIECE SHAFT L13 STRAIGHT

spray nozzle GB797SU (not included)



GB926R GB723R

ELAN 4 MIS HANDPIECE SHAFT L13 CURVED

spray nozzle GB797SU (not included)



GB927R GB723R

ELAN 4 MIS HANDPIECE SHAFT L13 HEAVY CURVED

spray nozzle GB797SU (not included)



AESCULAP® ELAN 4

ELAN 4 electro

SAWS



GA836 GB086R

ELAN 4 electro MICRO SAGITTAL SAW

spray nozzle GA258SU (not included)

180 W; 0 - 20,000 rpm; 161 x 23 mm; ∡ 7°; 190 g



GA837 GB087R

ELAN 4 electro
MICRO RECIPROCATING SAW

spray nozzle GA258SU (not included)

180 W; 0 - 20,000 rpm; 184 x 23 mm; ↕ 1.3 mm; 198 g



GA831 GB088R

ELAN 4 electro SAGITTAL SAW

spray nozzle GA258SU (not included)

180 W; 0 - 20,000 rpm; 129 x 23 mm; ∡ 4.5°; 220 g



GA832 GB087R

ELAN 4 electro RECIPROCATING SAW

spray nozzle GA258SU (not included)

180 W; 0 - 20,000 rpm; 194 x 23 mm; ↕ 2.5 mm; 238 g



GA833 GB088R

ELAN 4 electro TRANSVERSAL SAW

spray nozzle GA258SU (not included)

180 W; ↙ ↘; 0 - 20,000 rpm; 10 Ncm; 130 x 23 mm; ∡ 10°; 185 g

to be used with saw blade shafts GP580R, GP582R, GP586R and GP590R



AESCULAP® ELAN 4

ELAN 4 electro

DRILL



GA844 GB482R

ELAN 4 electro DRILL

with fixed motor cable, oscillating and tapping mode

200 W; ; 3.2 mm;
122 x 130 x 27 mm; 800 g

consisting parts:
GA344244 K-wire protection guide
TA011944 cleaning brush
GA344211 rinsing adapter
GB600880 Sterilit® spray adapter

Requires control unit with software version V3.00.



GB870R GB716R

INTRAMEDULLARY REAMER ATTACHMENT

with Jacobs chuck 0.5 - 7.4 mm,
not for use with acetabulum reamers

0 - 320 rpm; 6.5 Nm; 3.2 mm;
105 x 29 mm; 230 g

consisting parts:
key GA031R



GB871R GB716R

INTRAMEDULLARY REAMER ATTACHMENT

with large AO chuck,
not for use with acetabulum reamers

0 - 320 rpm; 6.5 Nm; 3.2 mm;
88 x 29 mm; 170 g



GB872R GB716R

INTRAMEDULLARY REAMER ATTACHMENT

with Hudson/Zimmer chuck,
not for use with acetabulum reamers

0 - 320 rpm; 6.5 Nm; 3.2 mm;
86 x 25 mm; 150 g



AESCULAP® ELAN 4

ELAN 4 electro

ATTACHMENTS

GB881R GB716R

DRILL ATTACHMENT

with Jacobs chuck 0.5 - 7.4 mm

0 - 1,250 rpm; 2 Nm; 3.2 mm;
89 x 29 mm; 163 g

consisting parts:
key GA031R




GB882R GB716R

DRILL ATTACHMENT

with Jacobs chuck 0.5 - 4 mm

0 - 1,250 rpm; 2 Nm; 3.2 mm;
76 x 22 mm; 100 g

consisting parts:
key GA062R



GB884R GB716R

DRILL ATTACHMENT

with small AO chuck

0 - 1,250 rpm; 2 Nm; 2.8 mm;
60 x 22 mm; 66 g



GB886R GB716R

DRILL ATTACHMENT

with AESCULAP® hexagonal chuck

0 - 1,250 rpm; 2 Nm; 3.2 mm;
57 x 24 mm; 67 g



GB887R GB716R

DRILL ATTACHMENT

with Dental shank

0 - 1,250 rpm; 2 Nm; 1.8 mm;
56 x 22 mm; 50 g




GB878R GB716R

DRILL ATTACHMENT

for Synthes radiolucent drive 511.300

0 - 1,250 rpm; 2 Nm;
111 x 27 mm; 181 g



GB894R GB716R

K-WIRE ATTACHMENT

for K-wires from 0.6 - 3.2 mm

0 - 1,250 rpm; 3.2 mm;
92 x 27 x 124 mm; 179 g



GB891R GB716R

SAGITTAL SAW ATTACHMENT

for "L-sagittal" sawblades

0 - 15,750 rpm; 74 x 33.5 mm;
4.5°; 179 g



GB892R GB716R

RECIPROCATING SAW ATTACHMENT

for reciprocating sawblades

0 - 15,750 rpm; 135 x 24.5 mm;
2.5 mm; 166 g



AESCULAP® ELAN 4

ELAN 4 electro

ATTACHMENTS

GB896R GB716R

SCREW ATTACHMENT

with small AO chuck

0 - 165 rpm; 12 Nm; 1.7 mm;
95 x 28 x 129.5 mm; 235 g



GB897R GB716R

SCREW ATTACHMENT

with AESCULAP® hexagonal chuck

0 - 165 rpm; 12 Nm; 1.7 mm;
92 x 28 x 129.5 mm; 231 g



AESCULAP® ELAN 4

ELAN 4 ACCESSORIES

GB861P GB727R

ELAN 4 LENGTH REDUCTION SLEEVE

for use with 1-ring handpieces



GB863P GB727R

ELAN 4 LENGTH REDUCTION SLEEVE

for use with 2-ring handpieces



GB862P GB727R

ELAN 4 MIS SLEEVE

for use with 1-ring handpieces



GB866R

ELAN 4 LATERAL BURR GUARD

for use with 1-ring handpieces and burrs up to 4.5 mm diameter



TE780

POWER CORD

Europe, 1.5 m

TE730

POWER CORD

Europe, 5.0 m

TE734

POWER CORD

UK, 5.0 m

TE735

POWER CORD


USA, Canada, Japan, 3.5 m



GA395SU

sterile 2 10

ELAN 4 electro DISPOSABLE TUBE SET

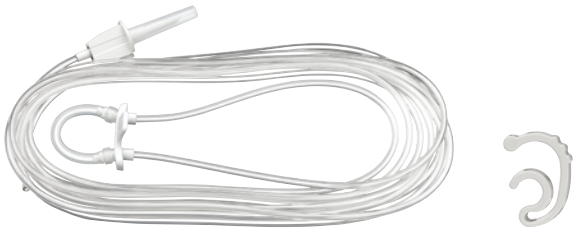

ELAN 4 SPRAY NOZZELS

sterile 2

GA259SU
for craniotome attachments

GA261SU
for 1-ring handpiece L4

GA262SU
for 1-ring handpiece L7

GA263SU
for 1-ring handpiece L10

GA264SU
for 1-ring handpiece L13

GA265SU
for 2-ring handpiece L7

GA266SU
for 2-ring handpiece L10

GA267SU
for 2-ring handpiece L13

GA268SU
for 2-ring handpiece L17

GA269SU
for 2-ring handpiece L22

GB796SU
for MIS handpiece shafts L10

GB797SU
for MIS handpiece shafts L13



GA258SU
for saws



AESCULAP® Acculan 4

LOOK. FEEL. EXPERIENCE.

Acculan 4 the battery-operated power system for orthopaedics, traumatology, cardiothoracic surgery and dermatology

- Powerful
- Longevity – Exclusion of battery and electronic control from sterilization process
- Easy handling – Titanium housing allows mechanical alkaline reprocessing



AESCULAP® Acculan 4

DRILL & ATTACHMENTS

GA330 GB495R

Acculan 4 DRILL AND REAMER

250 W; ↙↘; 4.0 mm;
207 x 121 x 55 mm; 1,250 g

consisting parts:
GA678 sterile funnel
GA672207 K-wire protection sleeve
TA011944 cleaning brush
GA672211 rinsing adapter
GB600840 Sterilit® spray adapter Acculan

Lid GA675 and NiMH battery GA676 to be ordered separately.

Measurements and weight are including battery and lid.



GB620R GB496R

Acculan 4 DRILL ATTACHMENT

with Jacobs chuck keyless 0.5 - 7.4 mm

0 - 1,000 rpm; 5.0 Nm; 4.0 mm;
133 x 35 mm; 397 g




GB621R GB496R

Acculan 4 DRILL ATTACHMENT

with Jacobs chuck 0.5 - 7.4 mm

0 - 1,000 rpm; 5.0 Nm; 4.0 mm;
118 x 35 mm; 300 g

consisting parts:
key GA031R



GB623R GB496R

Acculan 4 DRILL ATTACHMENT

with small AO chuck

0 - 1,250 rpm; 4.0 Nm; 2.8 mm;
90 x 35 mm; 210 g



ATTACHMENTS

GB639R GB496R

Acculan 4 DRILL ATTACHMENT

with Jacobs chuck 0.5 - 4.0 mm

0 - 1,250 rpm; 4.0 Nm; 4.0 mm; 105 x 35 mm; 243 g

consisting parts:
key GA062R



GB645R GB496R

Acculan DRILL ATTACHMENT

for Synthes radiolucent drive 511.300

0 - 900 rpm; 110 x 35 mm; 225 g




GB663R GB496R

Acculan 4 DRILL ATTACHMENT

with trinkle chuck

0 - 1,000 rpm; 5.0 Nm; 4.0 mm; 93 x 35 mm; 217 g



GB664R GB496R

Acculan 4 DRILL ATTACHMENT

with AESCULAP® hexagonal chuck

0 - 1,000 rpm; 5.0 Nm; 4.0 mm; 86 x 35 mm; 225 g



GB665R GB496R

Acculan 4 DRILL ATTACHMENT

with Hudson / Zimmer chuck

0 - 1,000 rpm; 5.0 Nm; 4.0 mm; 100 x 35 mm; 230 g



AESCULAP® Acculan 4

ATTACHMENTS

GB657R GB496R

Acculan 4 INTRAMEDULLAR ATTACHMENT

with large AO chuck

0 - 370 rpm; 12.0 Nm; 4.0 mm; 108 x 35 mm; 300 g




GB667R GB496R

Acculan 4 REAMER ATTACHMENT

with Jacobs chuck 0.5 - 7.4 mm chuck

0 - 250 rpm; 19.0 Nm; 4.0 mm; 133 x 35 mm; 280 g

consisting parts:
key GA031R



GB668R GB496R

Acculan 4 REAMER ATTACHMENT

with large AO chuck

0 - 250 rpm; 19.0 Nm; 4.0 mm; 108 x 35 mm; 300 g



GB669R GB496R

Acculan 4 REAMER ATTACHMENT

with Hudson / Zimmer chuck

0 - 250 rpm; 19.0 Nm; 4.0 mm; 118 x 35 mm; 300 g



GB670R GB496R

Acculan 4 REAMER ATTACHMENT

with Harris chuck

0 - 250 rpm; 19.0 Nm; 4.0 mm; 106 x 35 mm; 290 g



GB660R GB496R

Acculan SAGITTAL SAW ATTACHMENT

for Acculan rapid action saw blades with a maximum useable length of 50 mm

⇻ 0 - 17,000 rpm; ∡ 4°47'; 89 x 36 x 44 mm; 270 g



GB641R GB496R

Acculan K-WIRE ATTACHMENT

for K-wires from 0.6 - 4.0 mm

0 - 1,250 rpm; 93 x 36 x 137 mm; 285 g



AESCULAP® Acculan 4

OSCILLATING SAWS

GA331 GB495R

Acculan 4 OSCILLATING SAW

250 W; ⇹ 0 - 13,000 rpm; ∡ 4.1°;
211 x 177 x 55 mm; 1,600 g

consisting parts:
GA678 sterile funnel

Lid GA675 and NiMH battery GA676 to be ordered separately.

Measurements and weight are including battery and lid.



GA336 GB498R

Acculan 4 OSCILLATING SAW STRAIGHT

250 W; ⇹ 0 - 13,000 rpm; ∡ 4.1°;
290 x 55 x 84 mm; 1,480 g

consisting parts:
GA678 sterile funnel

Lid GA675 and NiMH battery GA676 to be ordered separately.

Measurements and weight are including battery and lid.



GA337 GB498R

Acculan 4 OSCILLATING STERNUM SAW

250 W; ⇹ 0 - 13,000 rpm; ∡ 4.1°;
290 x 55 x 84 mm; 1,480 g

consisting parts:
GA678 sterile funnel

Lid GA675 and NiMH battery GA676 to be ordered separately.

Measurements and weight are including battery and lid.



RECIPROCATING SAW

GA334 GB495R

Acculan 4 RECIPROCATING SAW

250 W; ⇻ 0 - 15,000 rpm; ⇕ 3.2 mm; 207 x 180 x 55 mm; 1,540 g

consisting parts:
GA678 sterile funnel
GB440215 cleaning plate
GA674890 cleaning adapter

Lid GA675 and NiMH battery GA676 to be ordered separately.

Measurements and weight are including battery and lid.



GB436R GB686R

PROTECTION GUIDE

for use with GA334 and saw blade GC761R



AESCULAP® Acculan 4

DERMATOME

GA340 GB498R

Acculan 4 DERMATOME

width keyless adjustable;
thickness adjustable (1 / 10 mm steps);
cutting thickness: 0.2 - 1.2 mm;
cutting width: max. 78 mm;
suitable blades: GB228R
(to be ordered separately)

250 W; ⇹ 0 - 6,500 rpm; ⇳ 3.1 mm;
277 x 113 x 83 mm; 1,650 g

consisting parts:
GA678 sterile funnel

Lid GA675 and small Li-Ion battery GA346 to be ordered separately.

Measurements and weight are including battery and lid.



GA341 GB498R

Acculan 4 DERMATOME 0.1 MM

width keyless adjustable;
thickness adjustable (1 / 10 mm steps);
cutting thickness: 0.1 - 1.1 mm;
cutting width: max. 78 mm;
suitable blades: GB228R
(to be ordered separately)

250 W; ⇹ 0 - 6,500 rpm; ⇳ 3.1 mm;
277 x 113 x 83 mm; 1,650 g

consisting parts:
GA678 sterile funnel

Lid GA675 and small Li-Ion battery GA346 to be ordered separately.

Measurements and weight are including battery and lid.



BA720R GB688R

SKIN GRAFT MESHER

for use in combination with skin graft carriers BA721 (1:1.5) / BA722 (1:3) / BA723 (1:6)

150 x 195 x 105 mm; 4,800 g

consisting parts:
BA725R cutting roller
BA726R ratchet wrench



AESCULAP® Acculan 4

LOOK. FEEL. EXPERIENCE.

Acculan 4 small drill – the smallest member of the Acculan 4 familiy can be used for small fragment Osteosynthesis as well as for reamed intramedullary nailing.



AESCULAP® Acculan 4

SMALL DRILL
DRILL & ATTACHMENTS

GA344 — GB482R

Acculan 4 SMALL DRILL

with oscillating and tapping mode;
not for use with acetabulum reamers

85 W; ; 3.2 mm;
177 x 124 x 55 mm; 840 g

consisting parts:
GA678 sterile funnel
GA344244 K-wire protection guide
TA011944 cleaning brush
GA344211 rinsing adapter
GB600880 Sterilit® spray adapter

Lid GA675 and small Li-Ion battery GA346 to be ordered separately.

Measurements and weight are including battery and lid.



GB870R — GB716R

INTRAMEDULLARY REAMER ATTACHMENT

with Jacobs chuck 0.5 - 7.4 mm,
not for use with acetabulum reamers

0 - 320 rpm; 5 Nm; 3.2 mm;
105 x 29 mm; 230 g

consisting parts:
key GA031R



GB871R — GB716R

INTRAMEDULLARY REAMER ATTACHMENT

with large AO chuck,
not for use with acetabulum reamers

0 - 320 rpm; 5 Nm; 3.2 mm;
88 x 29 mm; 170 g



GB872R — GB716R

INTRAMEDULLARY REAMER ATTACHMENT

with Hudson/Zimmer chuck,
not for use with acetabulum reamers

0 - 320 rpm; 5 Nm; 3.2 mm;
86 x 25 mm; 150 g



SMALL DRILL ATTACHMENTS

GB881R GB716R

DRILL ATTACHMENT

with Jacobs chuck 0.5 - 7.4 mm

0 - 1,250 rpm; 1.5 Nm; 3.2 mm; 89 x 29 mm; 163 g

consisting parts:
key GA031R




GB882R GB716R

DRILL ATTACHMENT

with Jacobs chuck 0.5 - 4 mm

0 - 1,250 rpm; 1.5 Nm; 3.2 mm; 76 x 22 mm; 100 g

consisting parts:
key GA062R



GB884R GB716R

DRILL ATTACHMENT

with small AO chuck

0 - 1,250 rpm; 1.5 Nm; 2.8 mm; 60 x 22 mm; 66 g



GB886R GB716R

DRILL ATTACHMENT

with AESCULAP® hexagonal chuck

0 - 1,250 rpm; 1.5 Nm; 3.2 mm; 57 x 24 mm; 67 g



GB887R GB716R

DRILL ATTACHMENT

with Dental shank

0 - 1,250 rpm; 1.5 Nm; 1.8 mm; 56 x 22 mm; 50 g



AESCULAP® Acculan 4


SMALL DRILL ATTACHMENTS

GB878R GB716R

DRILL ATTACHMENT

for Synthes radiolucent drive 511.300

0 - 1,250 rpm; 1.5 Nm;
111 x 27 mm; 181 g



GB894R GB716R

K-WIRE ATTACHMENT

for K-wires from 0.6 - 3.2 mm

0 - 1,250 rpm; 3.2 mm;
92 x 27 x 124 mm; 179 g



GB891R GB716R

SAGITTAL SAW ATTACHMENT

for "L-sagittal" sawblades

0 - 15,750 rpm; 74 x 33.5 mm;
4.5°; 179 g



GB892R GB716R

RECIPROCATING SAW ATTACHMENT

for reciprocating saw blades

0 - 15,750 rpm; 135 x 24.5 mm;
166 g; 2.5 mm



GB896R GB716R

SCREW ATTACHMENT

with small AO chuck

0 - 165 rpm; 10 Nm; 1.7 mm;
95 x 28 x 129.5 mm; 235 g



GB897R GB716R

SCREW ATTACHMENT

with AESCULAP® hexagonal chuck

0 - 165 rpm; 10 Nm; 1.7 mm;
92 x 28 x 129.5 mm; 231 g



AESCULAP® Acculan 4

CHARGER & BATTERIES

GA320

Acculan 4 CHARGER

for Acculan Li-Ion and NiMH batteries GA346, GA676; 4 charging bays; automatic battery diagnosis function; power cord not included

100 - 240 V AC; 50 / 60 Hz;
410 x 120 x 160 mm; 2,300 g



GA346

Acculan 4 LI-ION BATTERY SHORT

only for GA340, GA341 and GA344; with integrated electronic motor control 9.9 V; 10.89 Wh

120 x 43 x 50 mm; 265 g



GA676

Acculan NIMH BATTERY

only for GA330, GA331, GA334, GA336, GA337; with integrated electronic motor control 9.6 V; 1.95 Ah

140 x 43 x 50 mm; 425 g



GA679 GB489R

Acculan BATTERY REMOVAL DEVICE



GA675 GB487R

Acculan LID

90 g




GA678 GB488R

Acculan STERILE FUNNEL



AESCULAP® Acculan 4 Electro

LOOK. FEEL. EXPERIENCE.

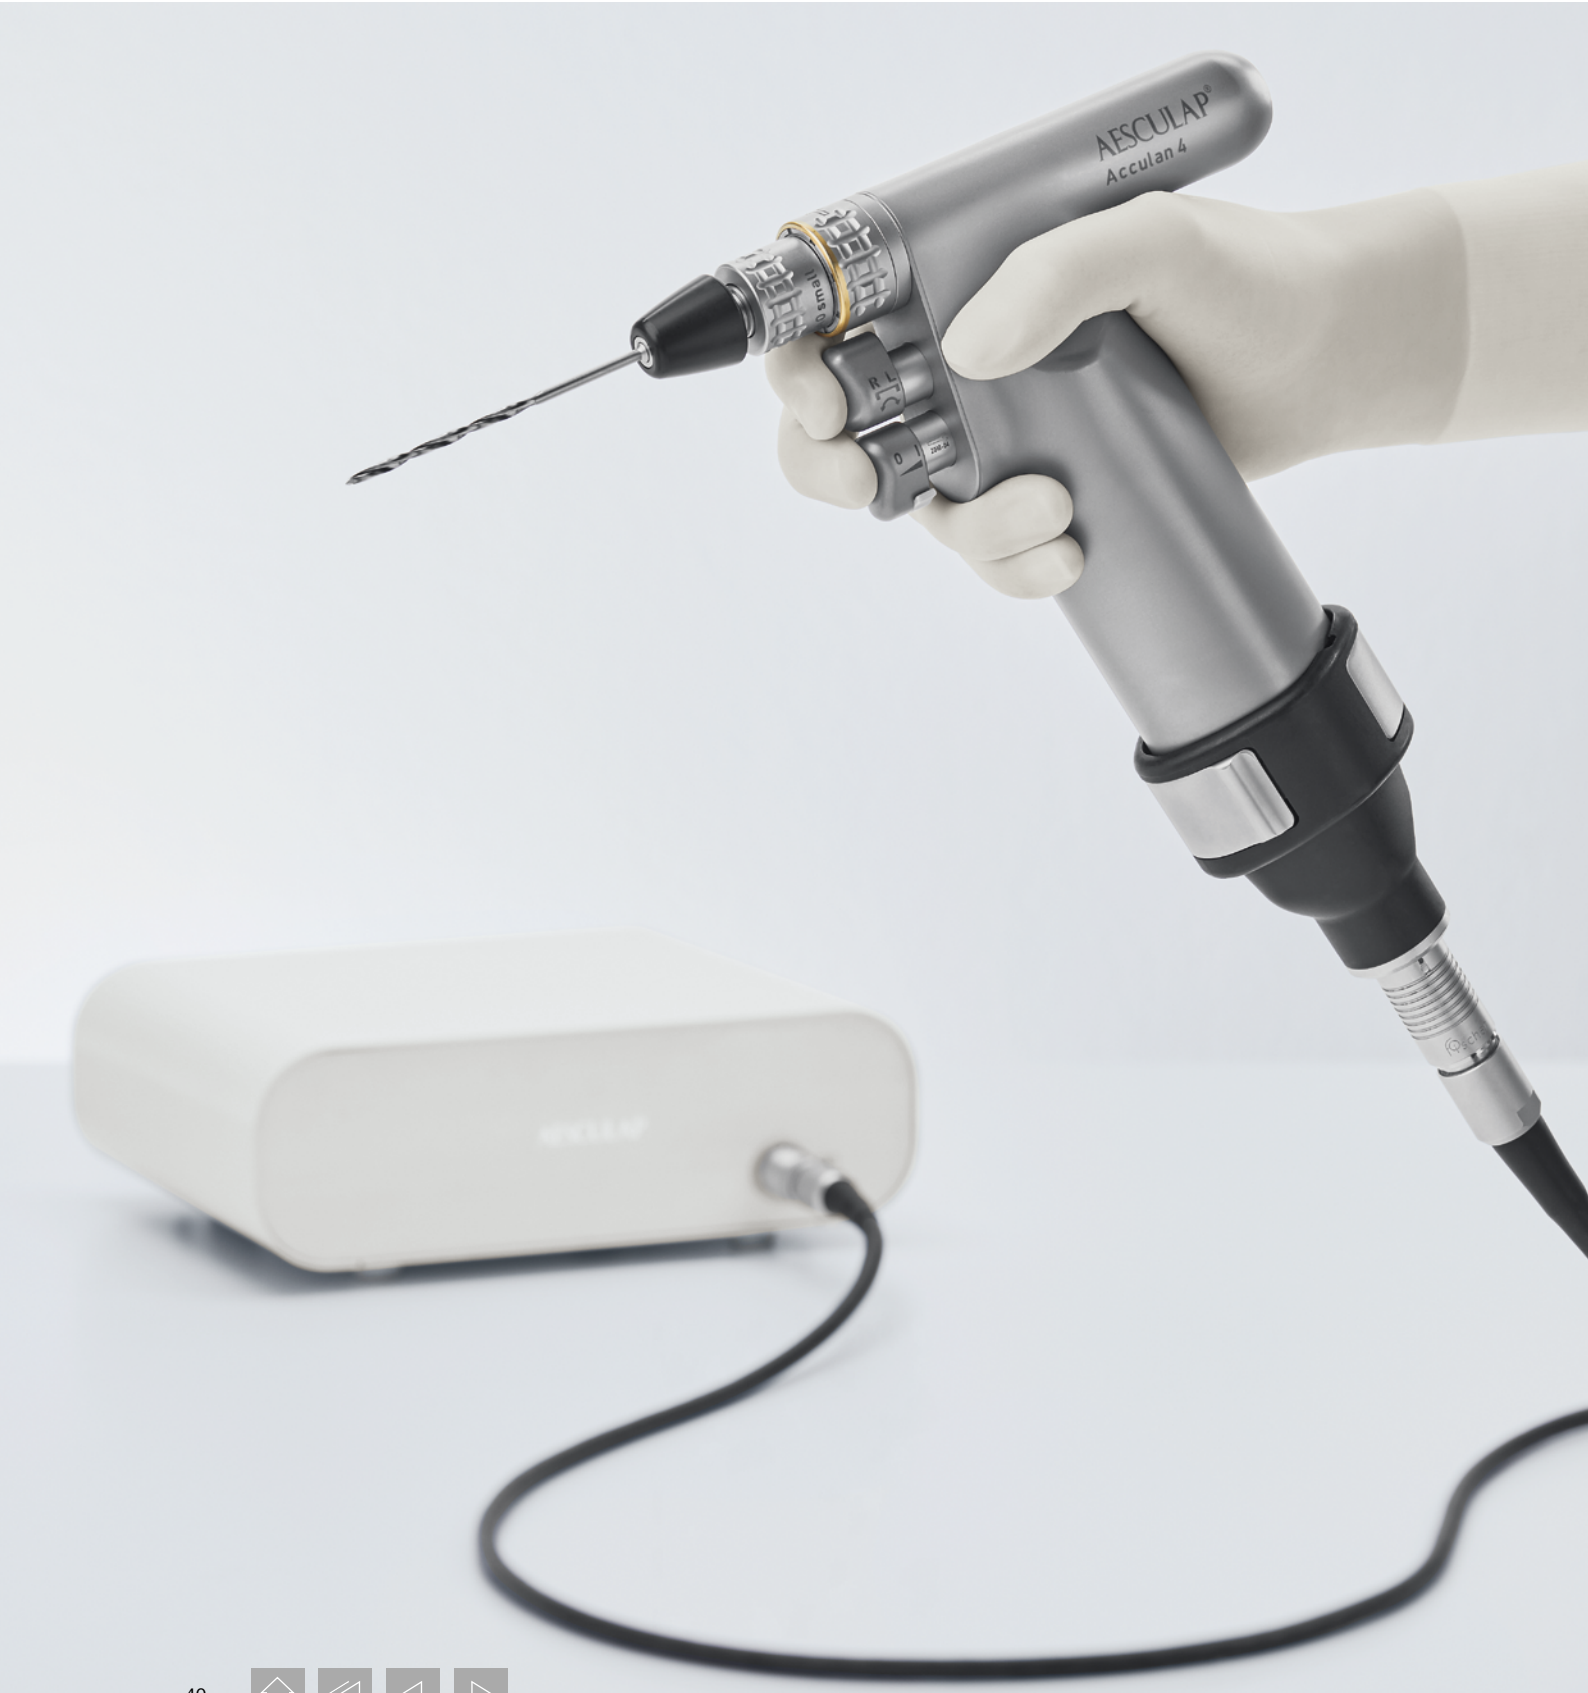

CONSOLE & BATTERIES

GA877

Acculan Electro CONSOLE

power cord not included

100 - 240 V AC; 50 / 60 Hz;
255 x 217 x 90 mm; 2,930 g



GA878 GB486R

Acculan Electro CONNECTION CABLE

for use with Acculan 4 handpieces

3.0 m; 410 g



GA875 GB485R

Acculan Electro LID



GA876

Acculan Electro ADAPTER

120 x 49 x 42 mm; 165 g



GA678 GB488R

Acculan STERILE FUNNEL



AESCULAP® Acculan 4 ACCESSORIES

ADAPTERS, KEYS & POWER CORD

GB176R — GB690R

ZIMMER ADAPTER

tool: Zimmer
motor: Hudson / Zimmer
only in combination with GB630R, GB656R, GB665R, GB669R or GB872R

3.0 mm



GB414R — JG344

AESCULAP® HEX ADAPTER

tool: AESCULAP® hexagonal
motor: triangular

3.5 mm



GB628R — JG344

SYNTHES DHS / DCS ADAPTER

tool: Synthes DHS / DCS
motor: AO large

4.0 mm



GB184R — JG344

HARRIS ADAPTER

tool: Harris
motor: AO large

3.4 mm



XF457R — JG344

DIN ADAPTER

tool: DIN
motor: AO large

3.7 mm



GA031R — JG342 + JG344

KEY

for large Jacobs chuck
suitable for GB620R, GB621R, GB667R, GB870R, GB881R



GA062R — JG342

KEY

for small 4 mm Jacobs chuck
suitable for GB639R, GB882R



TE780

POWER CORD

Europe, 1.5 m

TE730

POWER CORD

Europe, 5.0 m

TE734

POWER CORD

UK, 5.0 m

TE735

POWER CORD

USA, Canada, Japan, 3.5 m



AESCULAP® PROCESSING

Sterilit® POWER SYSTEMS



AESCULAP® PROCESSING

Sterilit® POWER SYSTEMS

GB600

Sterilit® POWER SYSTEMS

oil spray; 300 ml



GB600860

Sterilit® POWER SYSTEMS SPRAY ADAPTER

for ELAN 4 electro



GB600870

Sterilit® POWER SYSTEMS SPRAY ADAPTER

for ELAN 4 MIS handpiece shafts



GB600840

Sterilit® POWER SYSTEMS SPRAY ADAPTER

for Acculan 4



GB600880

Sterilit® POWER SYSTEMS SPRAY ADAPTER

for Acculan 4 small drill and ELAN 4 electro drill



AESCULAP® MECHANICAL PROCESSING

- The solution for storage and mechanical reprocessing of our AESCULAP® Power Systems.
- For detailed information please refer to the instructions for use.



AESCULAP® MECHANICAL PROCESSING

ECCOS® SETS


ELAN 4

GB261R

ELAN 4 electro ECCOS® SET

56 mm

consisting parts:
GB073R
GB076R
GB083R
GB085R
GB719R
GB072R
JF212R

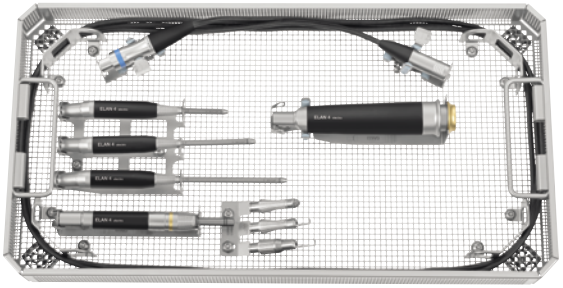


GB262R

ELAN 4 electro ECCOS® SET
FOR DRILL GA844

106 mm

consisting parts:
GB072R
GB073R
GB482R
GB715R
GB716R
2x GB690R
JG342
JG344

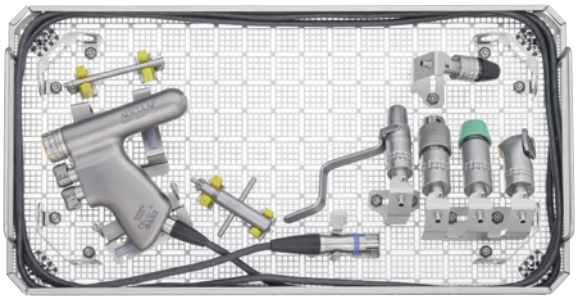


GB073R

ECCOS® HOLDER

for motor cable GA804, GA805, GA806 (set consisting of 2 pieces)

56 mm





GB076R

ECCOS® HOLDER

for perforator driver GA822

56 mm





GB077R

ECCOS® HOLDER

for intra motor GA824

56 mm






GB082R

ECCOS® HOLDER

for 1 handpiece

56 mm







GB083R

ECCOS® HOLDER

for 3 handpieces

56 mm





GB085R

ECCOS® HOLDER

for craniotome GA849

56 mm





GB086R

ECCOS® HOLDER

for micro sagittal saw GA836

56 mm





GB087R

ECCOS® HOLDER

for reciprocating saws GA832, GA837

56 mm





GB088R

ECCOS® HOLDER

for saws GA831, GA833

56 mm





AESCULAP® MECHANICAL PROCESSING

ECCOS®

ELAN 4 electro

GB482R

ECCOS® HOLDER

for ELAN 4 electro drill GA844

106 mm






GB715R

ECCOS® HOLDER

for 1 attachment GB870R, GB871R, GB872R, GB878R, GB881R, GB884R, GB892R, GB896R, GB897R

106 mm






GB716R

ECCOS® HOLDER

for 3 attachments GB870R, GB871R, GB872R, GB878R, GB881R, GB884R, GB892R, GB896R, GB897R

106 mm






GB084R

ECCOS® HOLDER

for MIS handpiece GA860

56 mm





GB723R

ECCOS® HOLDER

for MIS handpiece shafts GB920R - GB927R

56 mm






GB692R

RINSING DEVICE

for app lied parts, incl. ceramic filter GB693 10

(not suitable for autoclaving)






GB679R

RINSING DEVICE

for 4 MIS shafts, incl. ceramic filter GB693 10

(not suitable for autoclaving)





GB698R

RINSING ADAPTER

for applied parts

(for manual cleaning)



GB699R

RINSING ADAPTER

for MIS shafts

(for manual cleaning)



AESCULAP® MECHANICAL PROCESSING

ECCOS®


ELAN 4 ACCESSORIES

GB718R

ECCOS® HOLDER

for 12 1- and 2-ring burrs

56 mm





GB719R

ECCOS® HOLDER

for 3 craniotome attachments

56 mm





GB720R

ECCOS® UNIVERSAL HOLDER

for saw blades

56 mm






GB729R

ECCOS® HOLDER

for 2 reciprocating saw shafts

56 mm






GB730R

ECCOS® HOLDER

for 2 transversal saw shafts

56 mm





GB072R

ECCOS® CABLE / HOSE POS. GUIDE

for cable and hoses (set of 4 pieces)

56 mm





GB727R

ECCOS® HOLDER

for handpiece holding-sleeves GB861P, GB862P, GB863P

56 mm






GB572R

ECCOS® FIXATION

for GB300R - GB304R

56 mm





ECCOS® SETS
Acculan 4


GB257R

ECCOS® SET

for Acculan 4 small drill GA344

106 mm

consisting parts:
GB482R
GB487R
GB488R
GB715R
GB716R
2x GB690R
JG342
JG344

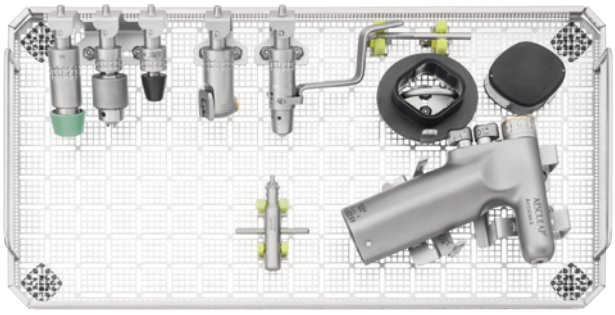


GB243R

ECCOS® SET

for 2 Acculan 4 machines

106 mm

consisting parts:
GB481R
GB487R
GB488R
GB495R
GB496R
GB497R
2x GB690R
JG342
JG344

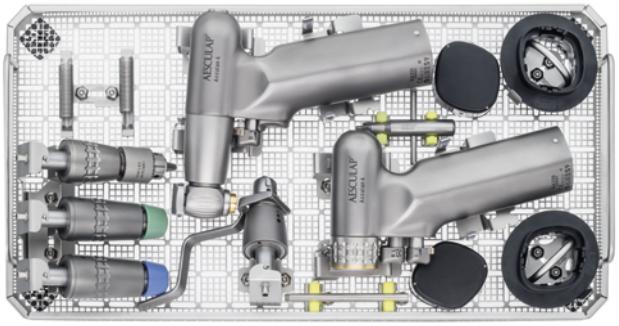


GB256R

ECCOS® SET

for Acculan 4 dermatome

106 mm

consisting parts:
GB487R
GB488R
GB498R
JJ464R

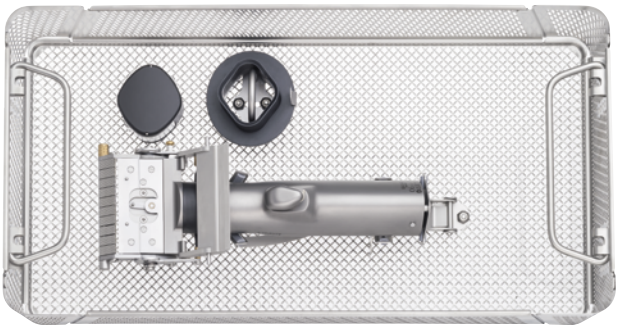

AESCULAP® MECHANICAL PROCESSING

ECCOS®

Acculan 4


GB482R

ECCOS® HOLDER

for Acculan 4 small drill GA344

106 mm






GB715R

ECCOS® HOLDER

for 1 attachment GB870R, GB871R, GB872R, GB878R, GB881R, GB884R, GB892R, GB896R, GB897R

106 mm






GB716R

ECCOS® HOLDER

for 3 attachments GB870R, GB871R, GB872R, GB878R, GB881R, GB884R, GB892R, GB896R, GB897R

106 mm





GB495R

ECCOS® HOLDER

for GA330, GA331, GA334

106 mm






GB496R

ECCOS® HOLDER

for GB620R, GB621R, GB623R, GB639R, GB641R, GB645R GB660R, GB663R, GB664R, GB665R, GB657R, GB667R, GB668R, GB669R, GB670R

106 mm





GB497R

ECCOS® HOLDER

for GB620R, GB621R, GB623R, GB639R, GB641R, GB645R GB660R, GB663R, GB664R, GB665R, GB657R, GB667R, GB668R, GB669R, GB670R

106 mm





GB487R

ECCOS® HOLDER

for GA675

56 mm






GB488R

ECCOS® HOLDER

for GA678

76 mm






GB489R

ECCOS® HOLDER

for GA679

106 mm






GB498R

ECCOS® HOLDER

for GA336, GA337, GA340, GA341

106 mm





GB686R

ECCOS® HOLDER

for GB436R

56 mm





AESCULAP® MECHANICAL PROCESSING

ECCOS® HOLDER

Acculan 4


GB485R

ECCOS® HOLDER

for GA875

56 mm






GB486R

ECCOS® HOLDER

for GA878

56 mm






GB688R

ECCOS® HOLDER

for BA720R

106 mm






GB481R

ECCOS® HOLDER

for saw blades and other accessories

56 mm





JF148R

MINI TRAY WITH LID

outer size: 145 x 44 x 25 mm
inner size: 140 x 39 x 18 mm

for storage of Acculan 4 Dermatome rod and flaps during automatic cleaning process



JJ589R

SOCKET WRENCH AF7



ECCOS® HOLDER
Universal Tools

GB459R
ECCOS® MOUNTING KIT


consisting of:
socket wrench AF10 and
hex-wrench



GB690R
ECCOS® HOLDER

5 mm
for drilling wire guide GA672207, GA344244






JG303R
REPLACEMENT SCREWS-SET

screw nut size AF7




JG342
SILICONE CLAMP

8.5 mm
screw JG303R to be ordered separately




JG344
SILICONE CLAMP

12 mm
screw JG303R to be ordered separately




AESCULAP® POWER SYSTEMS

TOOL ATTACHMENTS OVERVIEW




1:1

AO LARGE




1:1

AO SMALL




2:1

DENTAL




1:1

DIN




1:1

HARRIS




1:1

HUDSON




1:1

HEXAGON




1:1

SYNTHES
DHS / DCS



1:1


TRINKLE



1:1

ZIMMER

SIGNS & SYMBOLS

	LATEX-FREE All products listed in this catalogue are latex-free
	ARTICLE CODE ECCOS® FIXATION
	FORWARD / REVERSE DRIVE
	FORWARD DRIVE
	OSCILLATION FREQUENCY
	OSCILLATON ANGLE
	STROKE
	CANNULATION
	CABLE LENGTH
	WEIGHT
	PACKAGING UNIT
	SINGLE USE
	REQUIRED HEIGHT OF TRAY
	STERILE

AESCULAP® POWER SYSTEMS


BROCHURES

Main Catalogues


O84002
Power Systems



O17599
Burrs & Blades




CLICK HERE
for Electronic Instructions for Use (eIFU)




ELAN 4


O71602
ELAN 4



O71511
Mechanical Cleaning




O12002
Manual Cleaning



Acculan 4


O01802
Acculan 4




O01902
Acculan 4 Dermatome



O02002
Acculan 4 Electro



O02102
Acculan 4 Sternum Saws



INDEX

Art. No.	
BA720R	32
GA031R	42
GA062R	42
GA258SU	23
GA259SU	23
GA261SU	23
GA262SU	23
GA263SU	23
GA264SU	23
GA265SU	23
GA266SU	23
GA267SU	23
GA268SU	23
GA269SU	23
GA320	38
GA330	26
GA331	30
GA334	31
GA336	30
GA337	30
GA340	32
GA341	32
GA344	34
GA346	38
GA395SU	23
GA675	38
GA676	38
GA678	38, 41
GA679	38
GA800	7
GA804	8
GA805	8
GA806	7
GA808	7
GA810	7
GA822	8
GA824	8
GA831	15
GA832	15
GA833	15
GA836	15
GA837	15
GA844	17
GA849	9
GA860	13
GA861	10
GA862	10
GA863	10
GA864	10
GA865	11

Art. No.	
GA866	11
GA867	11
GA868	11
GA869	11
GA875	41
GA876	41
GA877	41
GA878	41
GB072R	50
GB073R	47
GB076R	47
GB077R	47
GB082R	47
GB083R	47
GB084R	49
GB085R	47
GB086R	47
GB087R	47
GB088R	47
GB176R	42
GB184R	42
GB243R	51
GB256R	51
GB257R	51
GB261R	46
GB262R	46
GB414R	42
GB436R	31
GB459R	55
GB481R	54
GB482R	48, 52
GB485R	54
GB486R	54
GB487R	53
GB488R	53
GB489R	53
GB495R	52
GB496R	52
GB497R	52
GB498R	53
GB572R	50
GB600	44
GB600840	44
GB600860	44
GB600870	44
GB600880	44
GB620R	26
GB621R	26
GB623R	26
GB628R	42

Art. No.	
GB639R	27
GB641R	29
GB645R	27
GB657R	28
GB660R	29
GB663R	27
GB664R	27
GB665R	27
GB667R	28
GB668R	28
GB669R	28
GB670R	28
GB679R	49
GB686R	53
GB688R	54
GB690R	55
GB692R	49
GB698R	49
GB699R	49
GB715R	48, 52
GB716R	48, 52
GB718R	50
GB719R	50
GB720R	50
GB723R	49
GB727R	50
GB729R	50
GB730R	50
GB796SU	23
GB797SU	23
GB861P	22
GB862P	22
GB863P	22
GB866R	22
GB870R	17, 34
GB871R	17, 34
GB872R	17, 34
GB878R	19, 36
GB881R	18, 35
GB882R	18, 35
GB884R	18, 35
GB886R	18, 35
GB887R	18, 35
GB891R	19, 36
GB892R	19, 36
GB894R	19, 36
GB896R	20, 37
GB897R	20, 37
GB920R	13
GB921R	13

Art. No.	
GB922R	13
GB925R	13
GB926R	13
GB927R	13
GB941R	9
GB942R	9
GB943R	9
GB945R	9
GB947R	9
JF148R	54
JF212R	46
JG303R	55
JG342	55
JG344	46, 55
JJ589R	54
TE730	22, 42
TE734	22, 42
TE735	22, 42
TE780	22, 42
XF457R	42

AESCULAP® – a B. Braun brand

Aesculap AG | Am Aesculap-Platz | 78532 Tuttlingen | Germany
Phone +49 7461 95-0 | Fax +49 7461 95-2600 | www.aesculap.com

The main product trademark "AESCULAP" and the product trademarks "ECCOS" and "Sterilit" are registered trademarks of Aesculap AG.

Subject to technical changes. All rights reserved. This brochure may only be used for the exclusive purpose of obtaining information about our products. Reproduction in any form partial or otherwise is not permitted.

O84002 0522/PDF/6